


## MagnaLED 2 Foot Retro Strip Kit


Magnetic Adhesive<sup>®</sup>

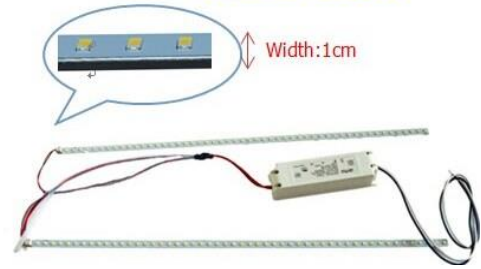


Watts	20W
LED Chip	SMD
Shape	Strip
Color Temperature CCT	3000K - 4000K - 5000K
Connection	Direct AC 120-277V
Installation of strips	Magnetic PCB, attaches to troffer
Installation of Driver	Magnetic driver, attaches to troffer
Attachment of PCB to Driver	Standard one way fit plugs
Power Factor	.98
CRI	80
Beam Angle	240 Degrees
Lumen Per Watt	121
Lumen Output	2433
Life (Average)	50000 Hours
Voltage	100V-277V
Length	24"
Code 5000K	DL2RT20W-5
Code 4000K	DL2RT20W-4
Code 3000K	DL2RT20W-3 (Special Order Only)
Warranty	5 Years

All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. LGI maintains the right to change the included data without notice due to improvements of the products.


## MagnaLED 2 Foot Retro Strip Kit

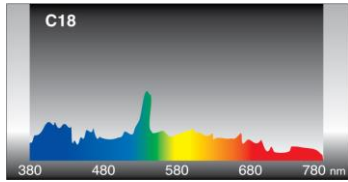


**5000K**

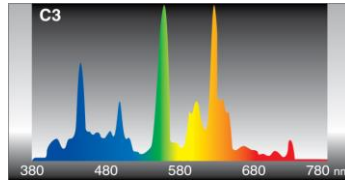

**4000K**

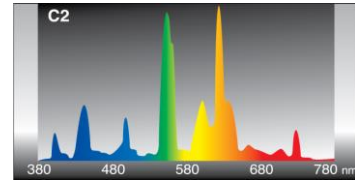

**3000K**

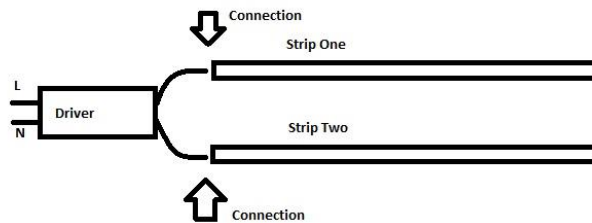

- 1-Turn Off Fixture
- 2-Remove Fluorescent Tubes from fixture
- 3-Disconnect AC Power from your ballast
- 4-Stick PCB Boards in desired area on the roof of the fixture
- 5-Stick Driver to the ceiling of fixture using the magnetic area
- 6-Connect PCB Boards to the driver using the supplied wires
- 7-Connect AC Power to the driver and secure connections with electrical wire nuts

All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. LGI maintains the right to change the included data without notice due to improvements of the products.