


40W LED 8 Ft LED T18 Ballast Bypass




Watts	40W
LED Chip	SMD
Shape	T8 Linear
Color Temperature CCT	4000K & 5000K
Connection	Linear Bipin (2 pin G13)
CRI	82
Cover	Frosted
Lumen Output	4000 Lumens
Housing	Aluminum
Life (Average)	50000 Hours
Voltage	100V-277V (Un-shunted lamp holder one side AC)
Length	48"
Code 5000K	DL8T40BB-5 (Add "/F" for Frosted)
Code 4000K	DL8T40BB-4 (Add "F" for Frosted)
Warranty	5 Years

All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. LGI maintains the right to change the included data without notice due to improvements of the products.

40W LED 8 Ft LED T18 Ballast Bypass

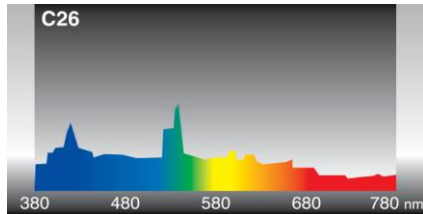


5000K

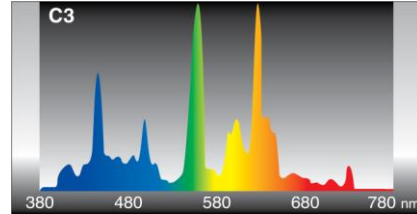

4000K

Wiring Diagram

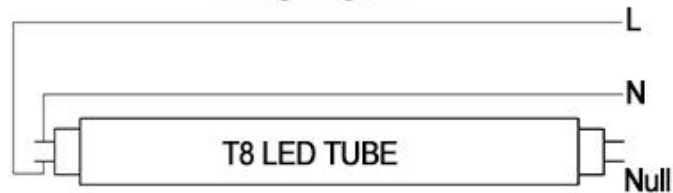

Caution:

RISK OF ELECTRIC SHOCK-USE IN DRY LOCATION ONLY.

NOT FOR USE WITH DIMMERS

All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. LGI maintains the right to change the included data without notice due to improvements of the products.