

18W LED 48" T8 Twin-Lume



Plug & Play or Remove Ballast The Twin-Lume works with both option

Watts	18W
LED Chip	SMD
Shape	T8 Linear
Color Temperature CCT	5000K and 4000K (Available in 3000K Special order)
Connection	Linear Bipin (2 pin G13)
Compatible Ballasts	Instant Start & Rapid Start
Option 1 (Plus & Play)	Replace existing tube with no changes
Option 2 (When your ballast dies)	Disconnect and Bi-pass ballast (follow diag. 1)
CRI	80
Beam Angle	240 Degrees
Cover	Clear and Frosted plastic
Lumen Output	1880
Housing	Aluminum
Life (Average)	50000 Hours
Voltage	100V-277V
Length	48"
Code 5000K	DL4T18-TL-5/F
Code 4000K	DL4T18-TL-4/F
Warranty	5 Years


All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. LGI maintains the right to change the included data without notice due to improvements of the products.

(877) 221-8182


(866) 611-2862 Fax

www.lgitek.com


18W LED 48" T8 Twin-Lume



3000K




4000K



5000K

Diagram 1 Bi-passing the ballast

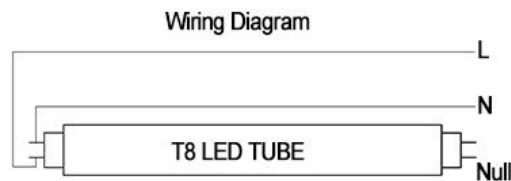

Caution:

RISK OF ELECTRIC SHOCK-USE IN DRY LOCATION ONLY.

NOT FOR USE WITH DIMMERS

Available in Assembled in USA option



All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. LGI maintains the right to change the included data without notice due to improvements of the products.