


Refrigerator/Freezer LED Tubes



Watts	4Ft 18W - 5Ft 24W - 6Ft 28W
LED Chip	SMD
Shape	T8 Linear
Color Temperature CCT	5000K
Connection	100-277 Ballast Bypass
CRI	82
Cover	Frosted Polycarbonate
THD	15%
Power Factor	.92
Lumen Output	4Ft 1650L 5Ft 2640L 6Ft 3080L
Lumen Per Watt	110
Housing	Aluminum PCB
Life (Average)	50000 Hours
Voltage	120 - 277 (connected through wires from one side)
Length	48" 60" 72"
Code 4Ft	LS-FT18W - DL4T18-FR-BB/5
Code 5ft	LS-FT24W - DL5T24-FR-BB/5
Code 6Ft	LS-FT28W - DL6T28-FR-BB/5
Warranty	5 Years

All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced, or used without written authorization. LGI maintains the right to change the included data without notice due to improvements of the products.

Refrigerator/Freezer LED Tubes

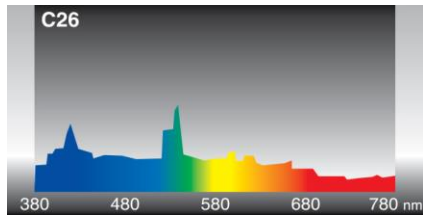

5000K

Installation Instructions

- Turn Power off.
- Disconnect and Bypass Ballast.
- Connect the wires coming out of tube to L & N 120V-277V -Install tube
- Make sure the side of the tube marked with L/N is connected to the side with the power.
- Be sure to mark fixture as LED Only replacement to avoid installation of a fluorescent tube into the fixture.
- Turn power on.

All parts of this document are ownership of LGI. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. LGI maintains the right to change the included data *without notice due to improvements of the products.*